

# JOKER MT 6-23

## GN 6 X 2/3

---

Combi steamer, electric, right hinged



## HIGHLIGHTS

### MT TECHNOLOGY:

- 7" MultiTouch Display
- Climatic MT
- Last®20
- Quick Set
- Multi Cooking
- Quick Mode
- autoclean® MT - optional
- HACCP/LMHV data logging and display
- Fan speed programmable for gentle cooking
- ELOMA live steam system
- Fan speed with pulsing and autoreverse
- SPS®: Steam Protection System

# JOKER MT 6-23 GN 6 X 2/3

## DIMENSIONS

Width x depth x height in mm: 520 x 640 x 705

Weight: 70 kg

Weight with packaging: 86 kg

Number levels: 6 x GN 2/3

Distance between levels: 63 mm

## ELECTRICAL SUPPLY

Voltage: 400V/ 3 N AC

Connection load: 5,90 kW

Rated current: 8,5 Amp

Protection: 3 x 10 Amp

Res. current circuit breaker: 10 Amp

Recommended cross section: 2,5 qmm

Geräuschemission: < 70 dB (A)

Article number: EL6313003-2X

## SAFETY CLEARANCE

Rear: min. 50mm

Right: min. 50mm

Left: min. 50mm

Minimum distance to heat sources: min. 50mm

## LOADING CAPACITY

GN 2/3: 6

## WATER CONNECTION

Water supply/dim: 2 x G 3/4" A

Flow pressure: 2 - 6 bar ( 200 - 600 kPa )

## DRAIN SYSTEM

Version: permanent connection (rec.) or funnel waste trap

Type: DN50 (min. Ø internal: 46mm)

Slope for waste water pipe: min. 3%

## WATER QUALITY

General requirement: drinking water

Total hardness: ≤ 3°dh / 70 - 125 ppm / 7-13° TH / 5-9

°e pH-value: 7,0 - 8,5

Cl (chloride): max. 60 mg/l

Cl<sub>2</sub> (free chlorine): max. 0.2 mg/l

SO<sub>4</sub> (sulphate): max. 150 mg/l

Fe (iron): max 0.1 mg/l

Temperature: max. 40°C

Electrical conductivity: min. 20 µ S/cm

Water pressure: 4 bar (2 - 6 bar)

## WATER CONSUMPTION

Soft water:: 6 l/h (bei 4 bar)

Hard water: 30 l/h (bei 4 bar)

## HEAT EMISSION

latent: 2,304 MJ/h, sensitive: 1,613 MJ/h

## STANDARDS

Safety: VDE - UL-CSA, SVGW, WRAS

Protection: IPX 5

Built according to: DIN 18866-2



# JOKER MT 6-23 GN 6 X 2/3

## STANDARD FEATURES

9 operating modes from 30°C to 300°C

7" MultiTouch Display

autoclean®MT - optional

Quick Set

Eloma live steam system

Steptronic®

Climatic®MT

Fan wheel pulsed for gentle cooking

Autoreverse fan wheel for even results

e/2 - energy savind mode

Start time setting up to 24h

400 programme spaces with 20 steps each

Quicke Mode

HACCP/LMHV data logging and display

Last\*20

Multi-point core-temperature sensor

Active Temp

Safety door lock

Integrated spray hose

Temperatures from 30°C to 300°C

SPS®: Steam protection system

Manual steaming

Multi Cooking

Delta-T cooking

Low-T-cooking

Favourites marking and filtering

## OPTIONS

Left hinged

Multi-Eco-Hood

Connection energy optimisation

External sous-vide probe

Special voltages

LAN/WLAN connection

Ocean version

## ACCESSORIES (EXTRACT):

Multi-Eco condensationhood

Combimix-Kits, support stands and condensation hoods for mix-stations

Vario-hanging racks for GN 1/1 and BN 46


Mobile plate rack

Installation solutions for shop systems and station kitchens

Trays, grids and pans

ProConnect data management software



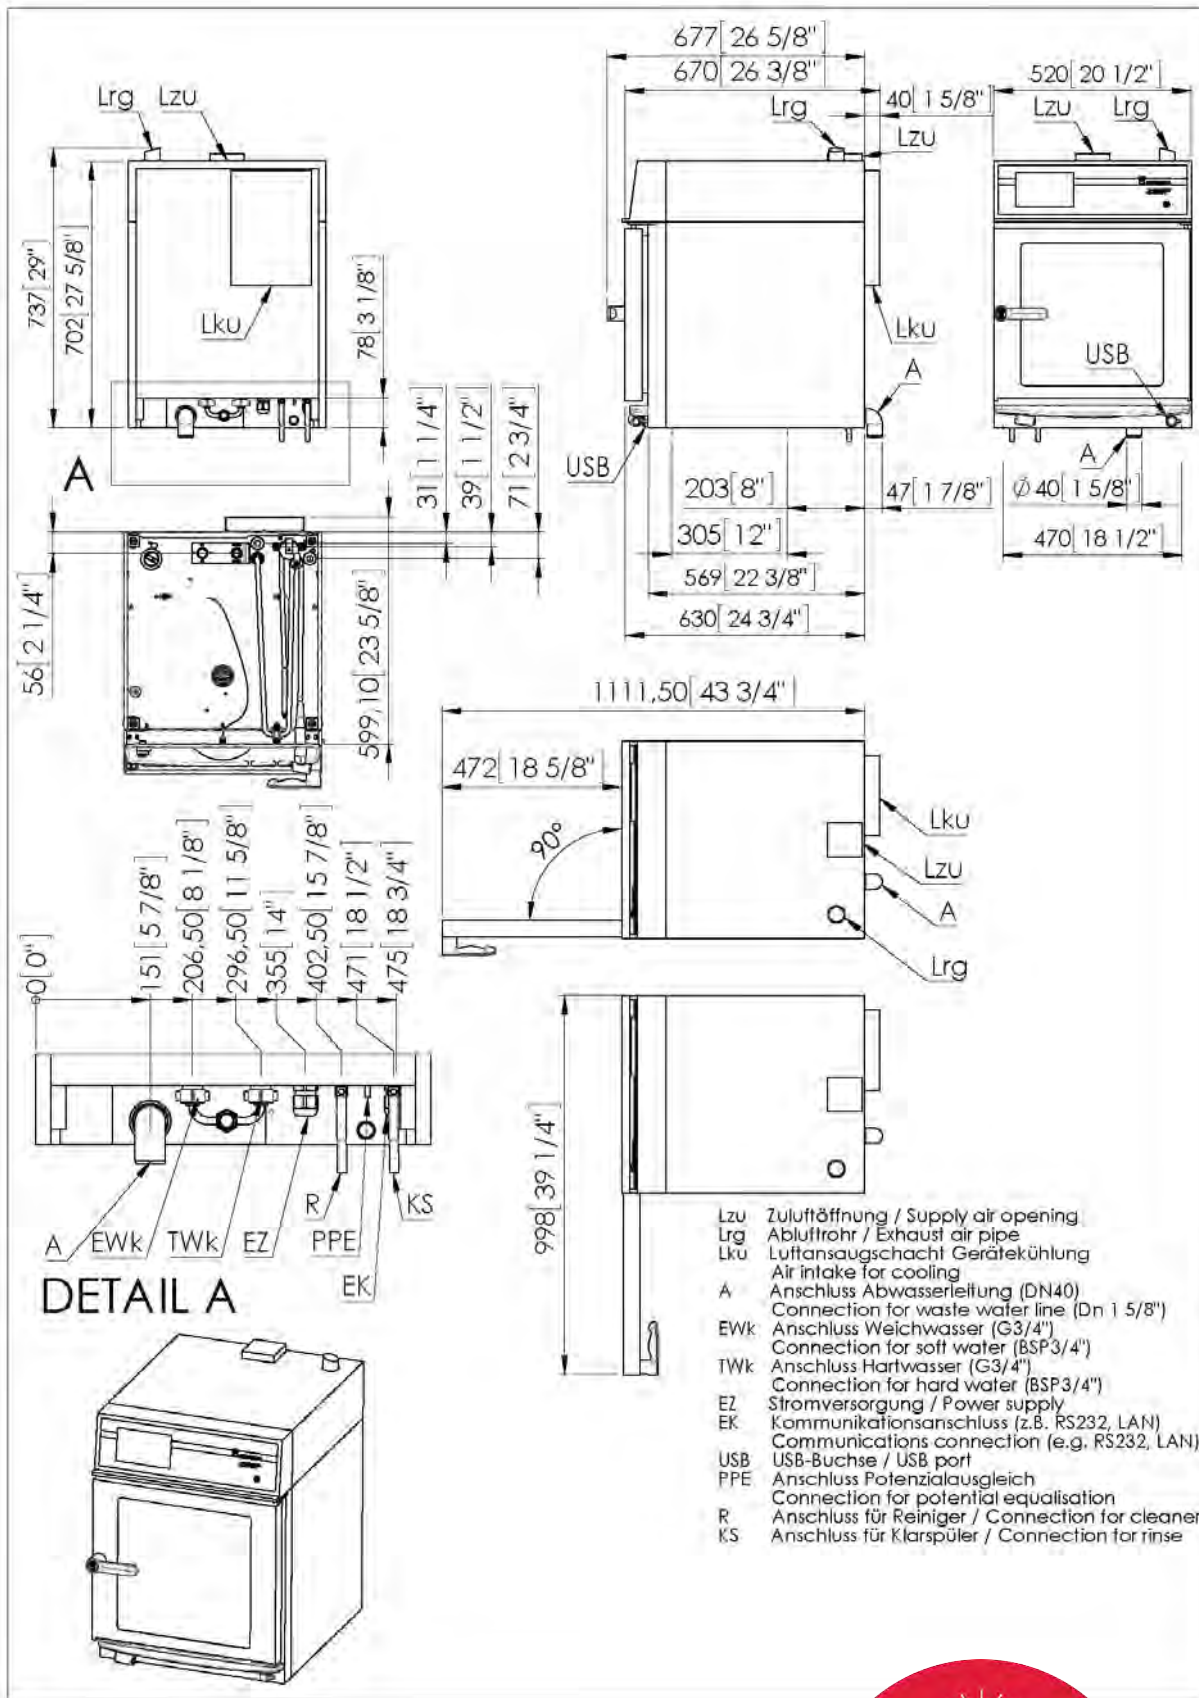

Eloma GmbH | Otto-Hahn-Str. 10 | 82216 Maisach/Germany  
 Phone: +49 8141 395-0 | Fax: +49 8141 395-130  
 Mail: sales@eloma.com  
 eloma.com

